

British Standard 4790:1987 "Determination of the effects of a small source of ignition on textile floor coverings, Hot Metal Nut method"


The following table sets out the results of the tests:-

Product Name	Duration Of Flaming (seconds)	Greatest Radius of Char		Classification
		Face (mm)	Back (mm)	
<u>Melcourt Playbark® 10/50</u>	21	25	0	Low
<u>Melcourt Playbark® 8/25</u>	42	20	0	Low
<u>Melcourt Playchips®</u>	0	15	0	Low
<u>Melcourt Kushyfal®</u>	30	15	0	Low
<u>Melcourt Softfall™</u>	60	30	0	Low

Note

- All tests were carried out by WIRA Testing Centre, Leeds during 1995 - 1996 and 1999.
- Each product was tested three times. The 'worse' case test results are listed above.
- The classification of the radius of effects of ignition are:

Low	up to 35	millimetres
Medium	40 - 75	millimetres
High	80 plus	millimetres
- Even though there is no legal requirement for The test results are specific to Melcourt LIAS products only.
- Melcourt Playsand is not combustible as was therefore not tested.
- The fire test methods set out in BS 4790:1987, are in accordance to fulfil the test requirements of BS EN1176.

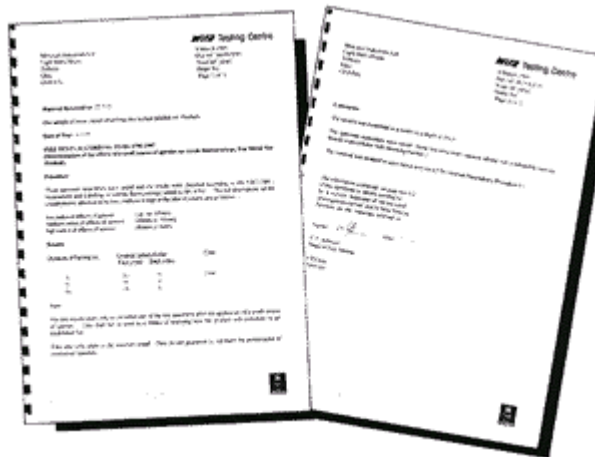

Contact

Melcourt Industries Limited, Boldridge Brake, Long Newnton, Tetbury, Gloucestershire. GL8 8RT
 Tel: +44 (0)1666 502711 Fax: +44 (0)1666 504398 Email: mail@melcourt.co.uk
 Web Site: www.melcourt.co.uk